


SPECIFICATION

CÁP ĐỒNG TRỤC ALANTEK RG11 : 301-RG110F-SSBK-1223

Standard Construction:

14 AWG, 0.064in. (1.63mm) Copper Covered Steel center conductor, Gas Expanded Polyethylene dielectric; Inner Shield Aluminum-Polypropylene-Aluminum laminated tape with overlap bonded to dielectric; Outer Shield of 34 AWG Aluminum wire braid shield; Outer Black Jacket of Polyethylene (PE). Nominal O.D 0.395in (10.03mm).

Other options are available upon request.

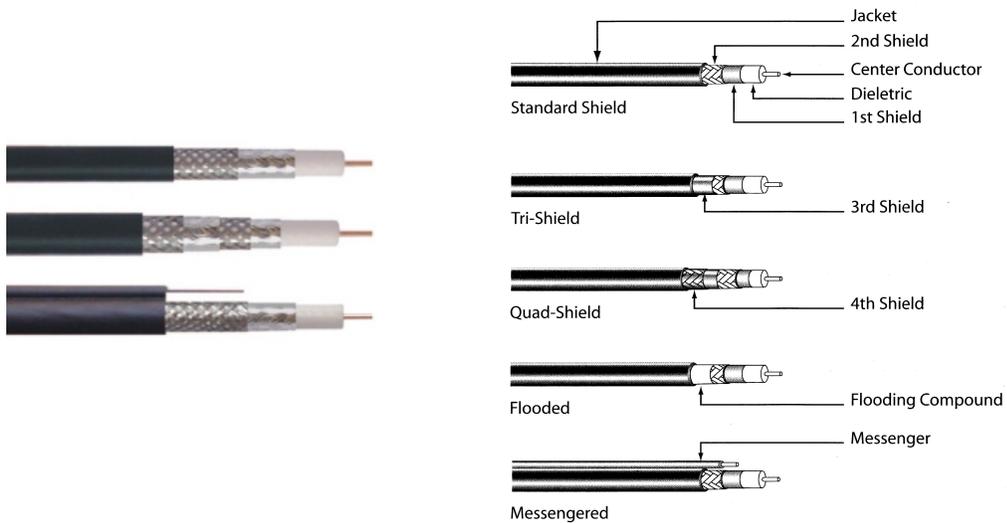

Attenuation at 20°C

Frequency (MHz)	Maximum (db/100ft)	Maximum (db/100m)
5	0.38	1.25
55	0.96	3.15
211	1.90	6.23
250	2.05	6.72
350	2.42	7.94
400	2.60	8.53
450	2.75	9.02
500	2.90	9.51
550	3.04	9.97
600	3.18	10.43
750	3.65	11.97
865	3.98	13.05
1000	4.35	14.27
1200	4.84	15.85
1450	5.42	17.78
1750	6.10	20.01
2000	6.53	21.44



Cable Physical Construction

Component	Standard Shield	Tri-Shield	Quad-Shield
	Inches (mm)	Inches (mm)	Inches (mm)
Nominal Center Conductor Diameter	0.064 (1.63)	0.064 (1.63)	0.064 (1.63)
Nominal Diameter Over Dielectric	0.280 (7.11)	0.280 (7.11)	0.280 (7.11)
Nominal Diameter Over First Shield (Tape)	0.287 (7.29)	0.287 (7.29)	0.287 (7.29)
Nominal Diameter Over Jacket	0.395 (10.03)	0.395 (10.03)	0.405 (10.29)
Nominal Jacket Wall Thickness	0.042 (1.07)	0.039 (0.99)	0.037 (0.94)
Nominal Diameter of Steel Messenger	0.072 (1.83)	0.072 (1.83)	0.072 (1.83)
Shield : Foil	Aluminum Laminated Foil, Bonded to Dielectric		
Shield : 2nd Foil	N/A	Alu. Laminated Foil	Alu. Laminated Foil
Braid :	Aluminum Wire, 60% Coverage		
Braid : 2nd Braid	N/A	N/A	Aluminum Wire, 40% Coverage

Electrical Characteristics at 20°C

Nominal Impedence	75 Ω
Nominal Velocity of Propagation	85%
Shielding Effectiveness	>100db
Capacitance	53.2 pF/m (nom.)

Mechanical Characteristics

Minimum Breaking Strength of Messenger	365 lbs. 166Kg
Cable Temperature Rating	Temp -20°C to 70°C

Part Number

